




SURFACE PREPARATION PRODUCTS

VpCI®-1238

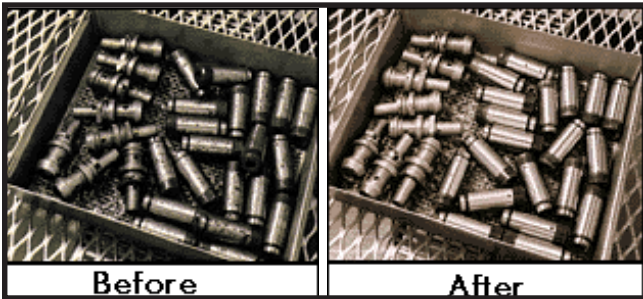

PRODUCT DESCRIPTION

VpCI-1238 is an additive that effectively boosts the corrosion protection to parts processed in vapor degreasing, cleaning and stripping baths. It is very effective for both ferrous and non-ferrous metals, provides up to additional six months of corrosion protection and even longer protection with proper packaging.

VpCI-1238 offers a proven and unique combination of contact and vapor corrosion inhibitors that provide complete protection against rust, oxidation and tarnish. During processing, the VpCIs vaporize and electrochemically combine with the metal surface in the vapor chamber. Reaching every area of a part, VpCI-1238 protects exterior surfaces as well as hard-to-reach interior and recessed areas.

VpCI-1238 does not alter the surface appearance of the parts or leave a residual film, and in nearly all cases, does not need to be removed from parts prior to further finishing or use. In addition, it has no effect on painting, welding or soldering. It will not change any critical physical properties including conductivity and resistance for even the most sensitive electrical and electronic components.

FEATURES

- CFC and 1,1,1 Trichloroethane free
- Non-toxic and does not contain any phosphates, nitrites, chromates or other heavy metals
- Protects all grades of steel including galvanized and aluminized steel as well as non-ferrous metals such as copper, brass and aluminum

- Compatible with all conventional vapor degreasing equipment
- Easy to handle
- Surfaces can be coated or painted without removing protective film
- Boosts corrosion protection

TYPICAL APPLICATION

VpCI-1238 can be used with all conventional vapor type systems for degreasing, cleaning and stripping as well as normal tank and flow-on equipment for solvent cleaning and degreasing.

METHOD OF APPLICATION

Add VpCI-1238 concentrate to the bath to achieve a ratio of 2% to 5% by weight. Higher concentration levels will increase the duration of corrosion protection.

TYPICAL PROPERTIES

Appearance	Clear yellow liquid
Non-volatile Content	7-10%
Density	6.5-7.1 lb/gal (0.77-0.85 kg/l)
Flash Point	154°F (68°C)

PACKAGING AND STORAGE

VpCI-1238 is available in 5 gallon (19 liter) pails, 55 gallon (208 liter) drums, liquid totes and bulk. The product should be stored in heated warehouse conditions to avoid freezing. Maximum storage temperature cannot exceed 70°F (21°C).



FOR INDUSTRIAL USE ONLY
KEEP OUT OF REACH OF CHILDREN
KEEP CONTAINER TIGHTLY CLOSED
NOT FOR INTERNAL CONSUMPTION
CONSULT MATERIAL SAFETY DATA SHEET FOR MORE INFORMATION

LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.

BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE, AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.



4119 White Bear Parkway, St. Paul, MN 55110 USA
Phone (651) 429-1100, Fax (651) 429-1122
Toll Free (800) 4-CORTEC, E-mail info@cortecvci.com
Internet <http://www.CortecVpCI.com>

printed on recycled paper  10% post consumer

Revised 7/10/03. Cortec Corporation 1998-2003. All rights reserved. Supersedes: 8/11/98. CorShield®, Cortec® and VpCI® are trademarks of Cortec Corporation.

Distributed by:



OTiK Sp. z o.o.

ul. Hutnicza 4
81-061 Gdynia
tel.: 58 6230498
fax: 58 6230496

otik@use.pl

www.inhibitory.use.pl



Certificate No.70781

Certificate No.81067