




HIGH PERFORMANCE VpCI™ COATINGS

VpCI®-390

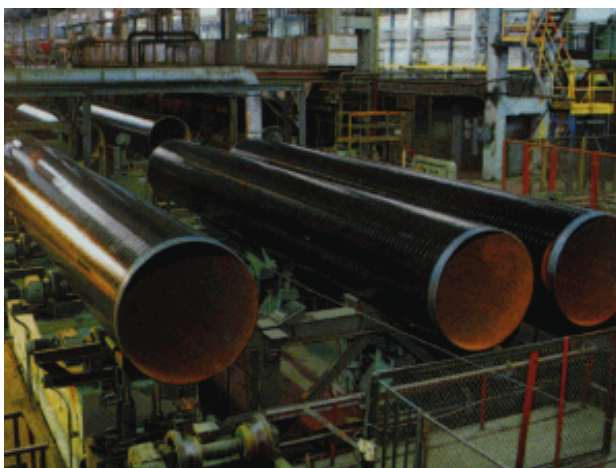

PRODUCT DESCRIPTION

VpCI®-390 is a waterborne, temporary coating that is intended for medium to long term outdoor protection. Once cured, it provides a non-tacky film that has excellent salt, humidity, and UV resistance.

EcoLine™ Cleaner/Degreaser or Cortec® VpCI®-433 can be used to remove VpCI®-390 if necessary. VpCI®-390 is also available in a black version.

FEATURES

- 1,200+ hr. humidity resistance at 2 mils (50 microns)
- 300-500 hr. salt spray resistance at 2 mils (50 microns)
- 600-800 hr. QUV resistance at 2 mils (50 microns)
- One hour tack-free time at room temperature
- Easily removed with EcoLine™ Cleaner/Degreaser or VpCI®-433
- Water-soluble, environmentally friendly and safe to apply
- Protects ferrous and non-ferrous metals

METALS PROTECTED

- Carbon steel
- Cast iron
- Aluminum
- Silver
- Stainless steel
- Galvanized steel
- Copper

APPLICATION

VpCI®-390 can be used to protect metal surfaces where a non-tacky surface is required.

It can be applied by spraying, rolling, brushing, or dipping. If multiple coats are required, apply the second coating once the first coat is dry-to-touch.

PHYSICAL PROPERTIES

Appearance	Tan liquid
Non-volatile Content	30-34%
Dry to Touch Time	8-16 hr. @ 2 mils (50 microns)
Viscosity	900-2000 cps
pH	8-10
Density	8.2-8.5 lb/gal (0.98-1.02 kg/l)
Recommended DFT	1.5-3.0 mil (37.5-75 μm)
Theoretical Spread Rate (at 1 mil)	480-550 sqft/gal (11.8-13.4m ² /l)
Temperature Stability (once coated)	375°F (190°C)
VOC	2.7-2.9 lbs/gal (324-348 g/L)

PACKAGING AND STORAGE

VpCI®-390 is available in 5 gallon (19 liter) pails, 55 gallon (208 liter) drums, liquid totes and bulk. Keep product from freezing.

FOR INDUSTRIAL USE ONLY
KEEP OUT OF REACH OF CHILDREN
KEEP CONTAINER TIGHTLY CLOSED
NOT FOR INTERNAL CONSUMPTION
CONSULT MATERIAL SAFETY DATA SHEET FOR MORE INFORMATION

LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.

BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE, AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.



4119 White Bear Parkway, St. Paul, MN 55110 USA
Phone (651) 429-1100, Fax (651) 429-1122
Toll Free (800) 4-CORTEC, E-mail info@cortecvc.com
Internet <http://www.CortecVpCl.com>

printed on recycled paper  10% post consumer

Revised 3/3/03. Cortec Corporation 2000-2003. All rights reserved. Supersedes: 12/5/00.
VpCI® and EcoLine™ are a trademarks of Cortec Corporation.

Distributed by:



OtiK Sp. z o.o.
ul. Hutnicza 4
81-061 Gdynia
tel.: 58 6230498
fax: 58 6230496
otik@use.pl
www.inhibitory.use.pl



Certificate No.70781

Certificate No.81867